


# BOUNDARY GARD™

# BX-80N




Outdoor PIR Protection that covers a building's perimeter: the BX-80N's long, narrow detection area comes from the centre point, covering both sides.


The BX-80N creates a multi-layered, horizontal barrier that detects intruders and sounds the alarm before they actually break in. Just one BX-80N can protect a long area, because it is installed in the centre of the detection area and protects both sides. BoundaryGard™ makes you feel secure in knowing your building is well guarded.

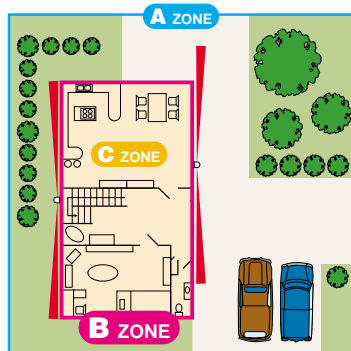

# BOUNDARY GARD™ BX-80N

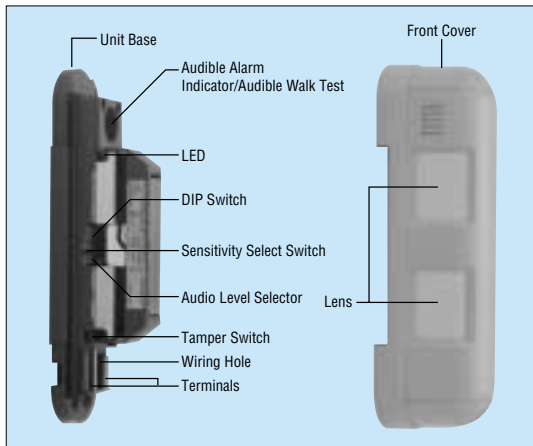

## DIMENSIONS

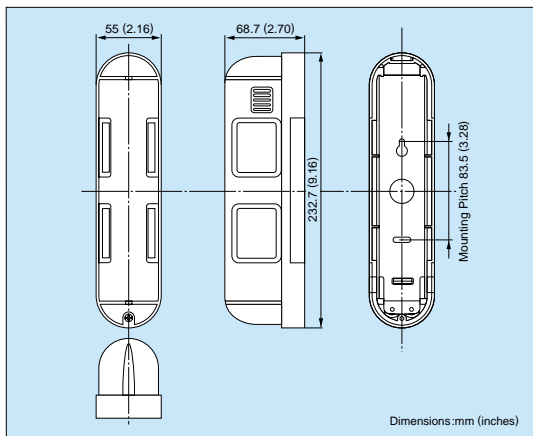

## SPECIFICATIONS

Model	BX-80N
Detection Method	Passive Infrared
Coverage	24m (80ft) (12m [40ft] on each side)
Detection Zones	4 zones (2 zones on each side)
Sensitivity	1.6°C (3°F) at 0.6m/sec. (2ft/sec.)
Detectable Speed	0.3 ~ 1.5m/sec. (1 ~ 5ft/sec.)
Power Input	10 ~ 28VDC
Current Draw	Normal ** mA Max. ** mA
Alarm Period	2.0 ± 1.0 sec.
Relay Output	2 Relay Outputs N.O. and N.C. 28 VDC 0.2A (Max.) each
Tamper Switch	N.C. Opens when cover removed
Pulse Count	TEST or 2
Warm-up Period	Approx. 45 sec. (LED blinks)
Volume of Audible Alarm Indicator	**dB (at 1 metre distance)
LED Indicator	LED is blinking during warm-up period, Alarm condition
Operating Temperature	-20°C ~ +50°C (-4°F ~ +122°F)
Environment Humidity	95% (Max.)
RF Interference	No Alarm **V/m
Mounting	Wall (Indoor/Outdoor)
Mounting Height	0.8 ~ 1.2m (2.7 ~ 4ft)
Weight	***g (**oz)
IP Rating	IP55
Accessories	M4 Mount screws x 20 x 2

## FEATURES

### ■ 24m-Long Range Detection

Optex's advanced PIR technology creates a narrow, 24m-long detection area that protects wide horizontal areas, such as a building's perimeter.

### ● Limited Detection Range Function

The detection range of the BX-80N can be adjusted to avoid detecting unwanted objects.

### ● Size-Judging Function

The BX-80N has a Layered Detection Pattern that discriminates between large and small objects in the detection area. Only when both the upper and lower detection layers detect movement, does the BX-80N generate an alarm.

### ■ Easy Installation

Convenient and simple to install, the BX-80N is mounted in the centre of the detection area and protects both sides. Since there's no need to align transmitters and receivers, one person can install the BX-80N quickly and easily.


### ■ Alarm Indicator

An audible alarm indicator on the BX-80N deters would-be intruders from continuing their break-in attempt.

### ■ Attractive Slender Design

Its smart, stylish design blends in well with any type of architecture.

## DETECTION PATTERNS

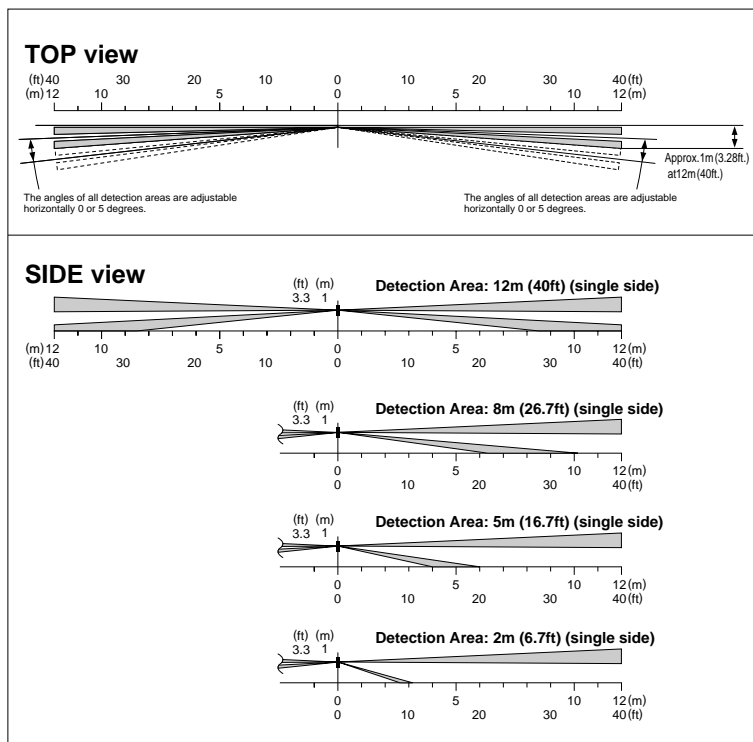

## OPTIONS

### ■ METAL GUARD : MG-1

Helps to protect the unit from tampering or vandalism.

\* Specifications and design are subject to change without prior notice.

NOTE: This unit is designed to detect an intruder and activate an alarm control panel. Being only a part of a complete system, we cannot assume responsibility for theft or damages, should it occur.



OPTEX CO., LTD. (ISO 9001 Certified by LRQA)  
4-7-5 Nishinohama, Otsu, 520-0801, Japan  
TEL(077)524-6047 FAX(077)522-9022

OPTEX INCORPORATED  
1845 W. 205th St. Torrance, Ca. 90501-1510 U.S.A.  
TEL(310)533-1500 FAX(310)533-5910

OPTEX (EUROPE) LTD. (ISO 9002 Certified by NQA)  
Clivernon Road, Cordwallis Park, Maidenhead, Berkshire, SL6 7BU U.K.  
TEL(01628)631000 FAX(01628)636311

